




## NEROLAC NC SANDING SEALER



### PRODUCT DESCRIPTION

Nerolac NC Sanding Sealer is a quick drying sealer is easier to sanding and gives a smooth finish for interior application is recommended for filling the grains of wood prior to application of top coats such as laquer.

### PERFORMANCE FEATURES & BENEFITS

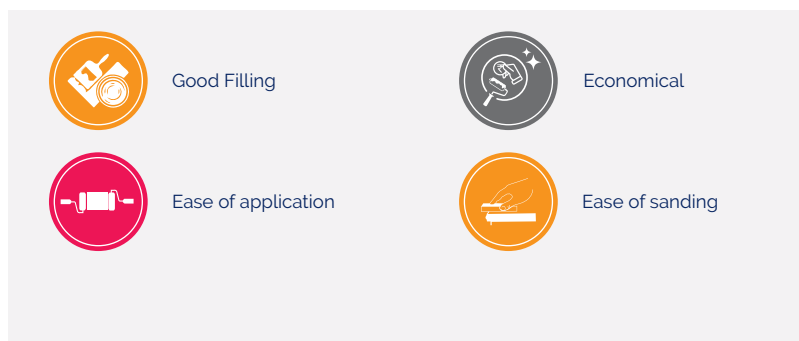

### SURFACE PREPARATION

- For New Wood**  
 Sand the surface along the grains with emery paper # 180 followed by emery paper # 320 or # 400 wipe off loose dust particles.
- For Pre-polished wood**  
 Remove all existing coatings by sanding or scrapping & follow the same procedure as mentioned for new wood above.

### DIRECTION FOR USE

- Apply Nerolac Gloria Wood Filler with muslin cloth or putty knife to fill the grains. Allow to dry for 2 to 3 h. Dry sand excess filler on surface with # 400 emery paper. Repeat filler coats depending on the level of filling / perfection required.
- Apply Nerolac NC Sanding Sealer by  
**Cloth application : 1 part sealer : 1 part Nerolac NC Thinner OR Spray application : 1 part sealer : 1.5 part Nerolac NC Thinner OR Putty knife with appropriate proportion of Nerolac NC Thinner**
- Repeat the sealer coat depending on the level of filling / perfection required. Sand the dried surface with emery paper # 400. The dry surface is now ready for applying a Nerolac WonderWood 1 K PU Clear or Nerolac WonderWood Melamine Finish and can add NC also.

### PRECAUTIONS

- Store Nerolac NC Sanding Sealer in a cool, dry place.
- Keep container tightly closed, out of children's reach & away from food.
- Keep the sealer away from sources of ignition.
- Avoid inhalation of vapor by wearing a suitable nose pad during sanding & surface preparation.
- Ensure good ventilation at all times, In case of contact with eyes, rinse with plenty of water and seek medical advice immediately.

### DISPOSABILITY

Do not pour the leftover sealer down a drain. Seal & keep for disposal. Contains no added Lead, Mercury or Chromium compounds.

### POST APPLICATION INSTRUCTIONS

Allow it to dry for 2 - 3 h before application of Clear Coat.



**POST APPLICATION INSTRUCTIONS**

For the best performance, ensure dry dust-cleaning at regular intervals. Allow a drying-time of 2 weeks for proper film-formation before doing any sponge cleaning with a mild soap-solution or mineral turpentine.

**STAIN-CLEANING INSTRUCTIONS**

- The paint film needs at least a week after application, to be set & ready for the stain-removal.
- Wipe gently. Do not use liquid bleach.
- For light stains like mud, pencil, tea, coffee etc., use a sponge soaked with soap-solution.
- For tougher stains like pickle, oil, grease, wax & oil crayons etc., use a sponge soaked with mineral turpentine.
- The early removal of stains gives better results.



**PACK SIZE**

20L., 4L., 1L & 500 ml.



**SHELF LIFE**

2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct sunlight and excessive heat.

**DISCLAIMER**

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The Company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.